


NRGSAVE EDGE II

Glare-less Down Light

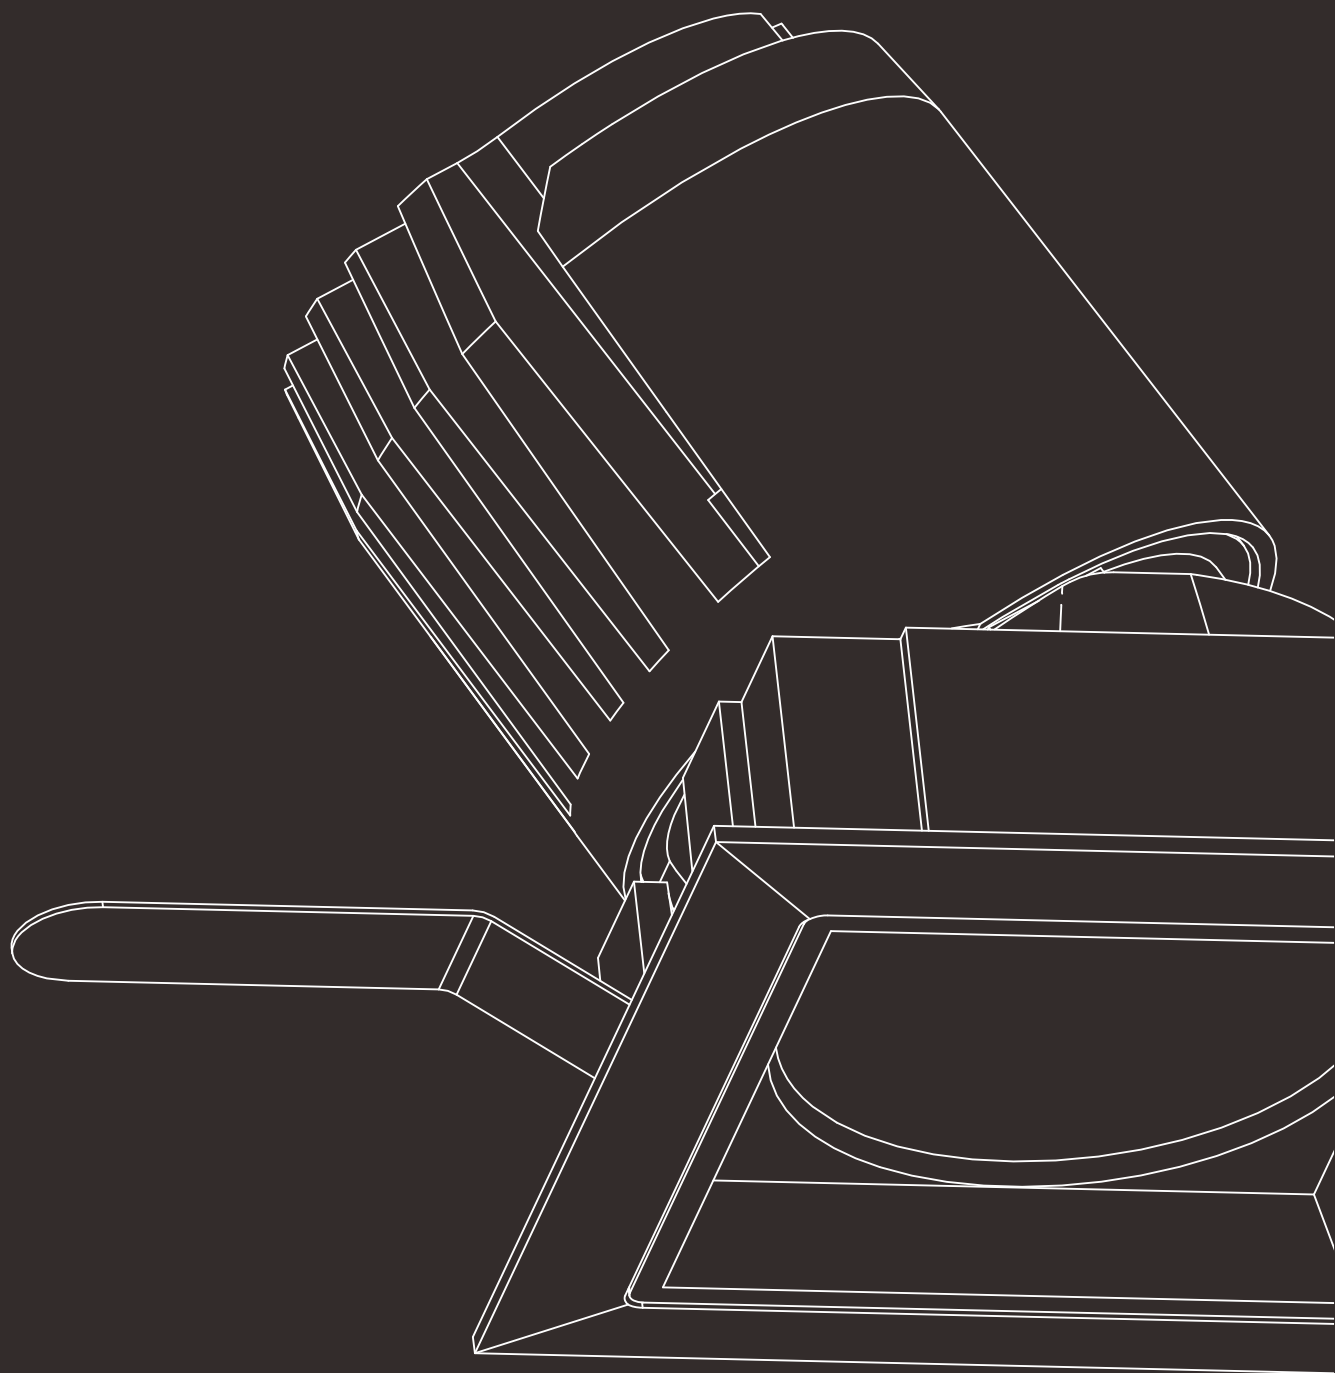

EDGE II

Glare-less Down Light.



**THE
HOSPITALITY
LUMINAIRE**




This glare-free fixture family allows architects and designers to work with different lighting applications. Thanks to precise engineering, the use of superior reflector materials and various glare control accessories, the EDGE II fixtures guarantee maximum visual comfort and optimal optic performance. The miniature design with clean sightlines make people focus on the light instead of the luminaire.

Beams, effects, filters, output levels, trimless or with trim, fixed or adjustable, and smart controls like Casambi, Dali, phase-cut, the vast range of options allow you to work with different lighting demands throughout the entire project. Furthermore, the unique interchangeable light engine design helps perfectly protect the ceiling during maintenance.






Trim

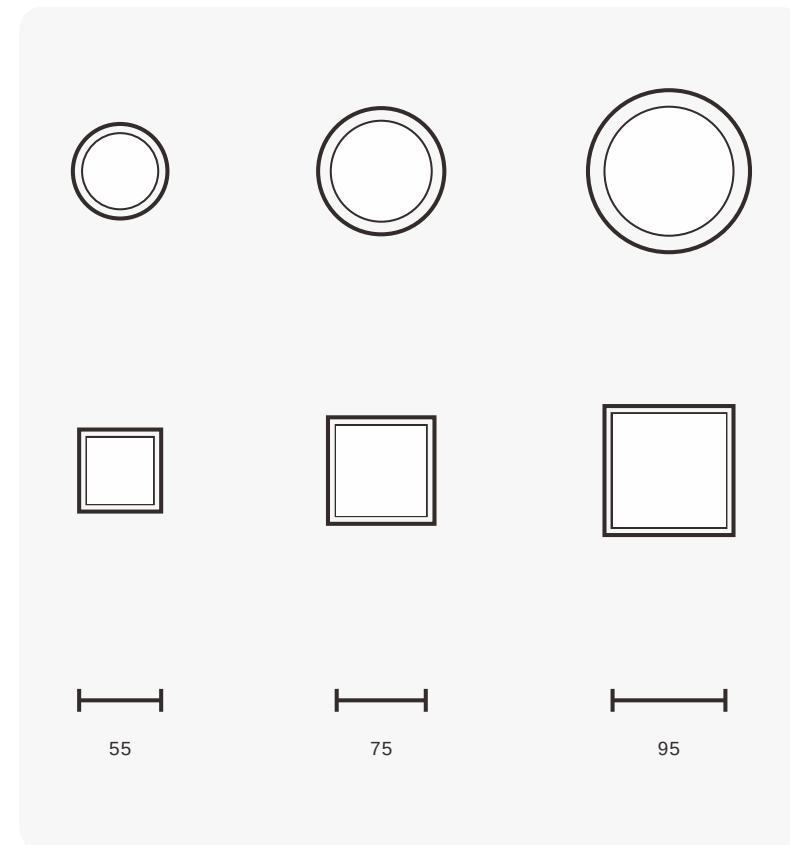

EDGE II trim version comes with minimal sightline only 5mm, which draws no attention to the frame but to the light.




Trimless

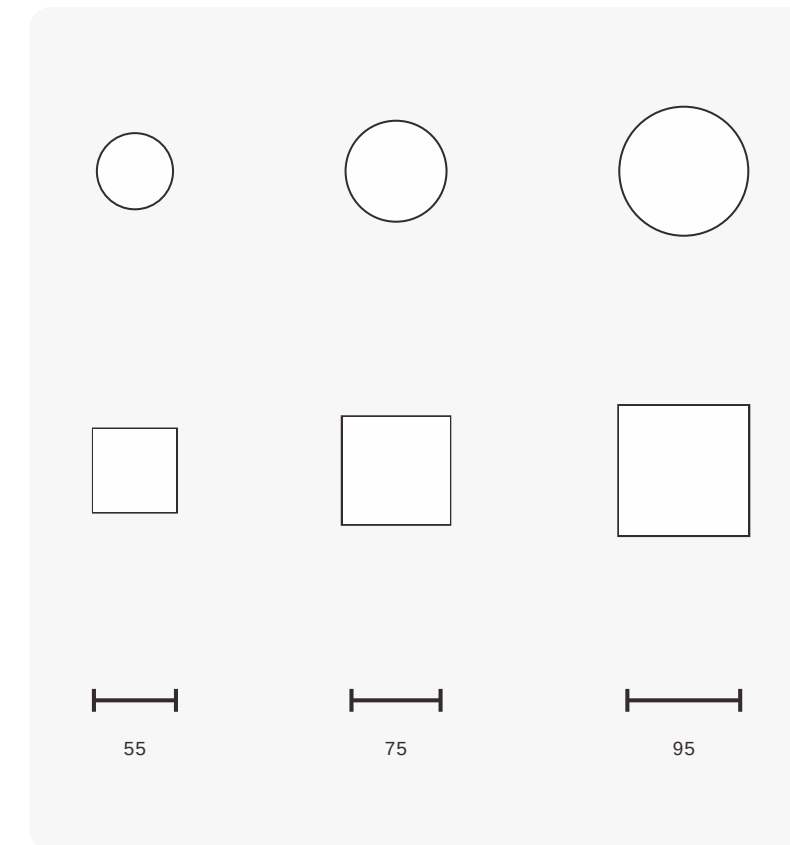

EDGE II trimless version gives you a very clean ceiling, it maximizes the eye comfort and minimizes the visual impact.

EDGE II Lighting System Accessories

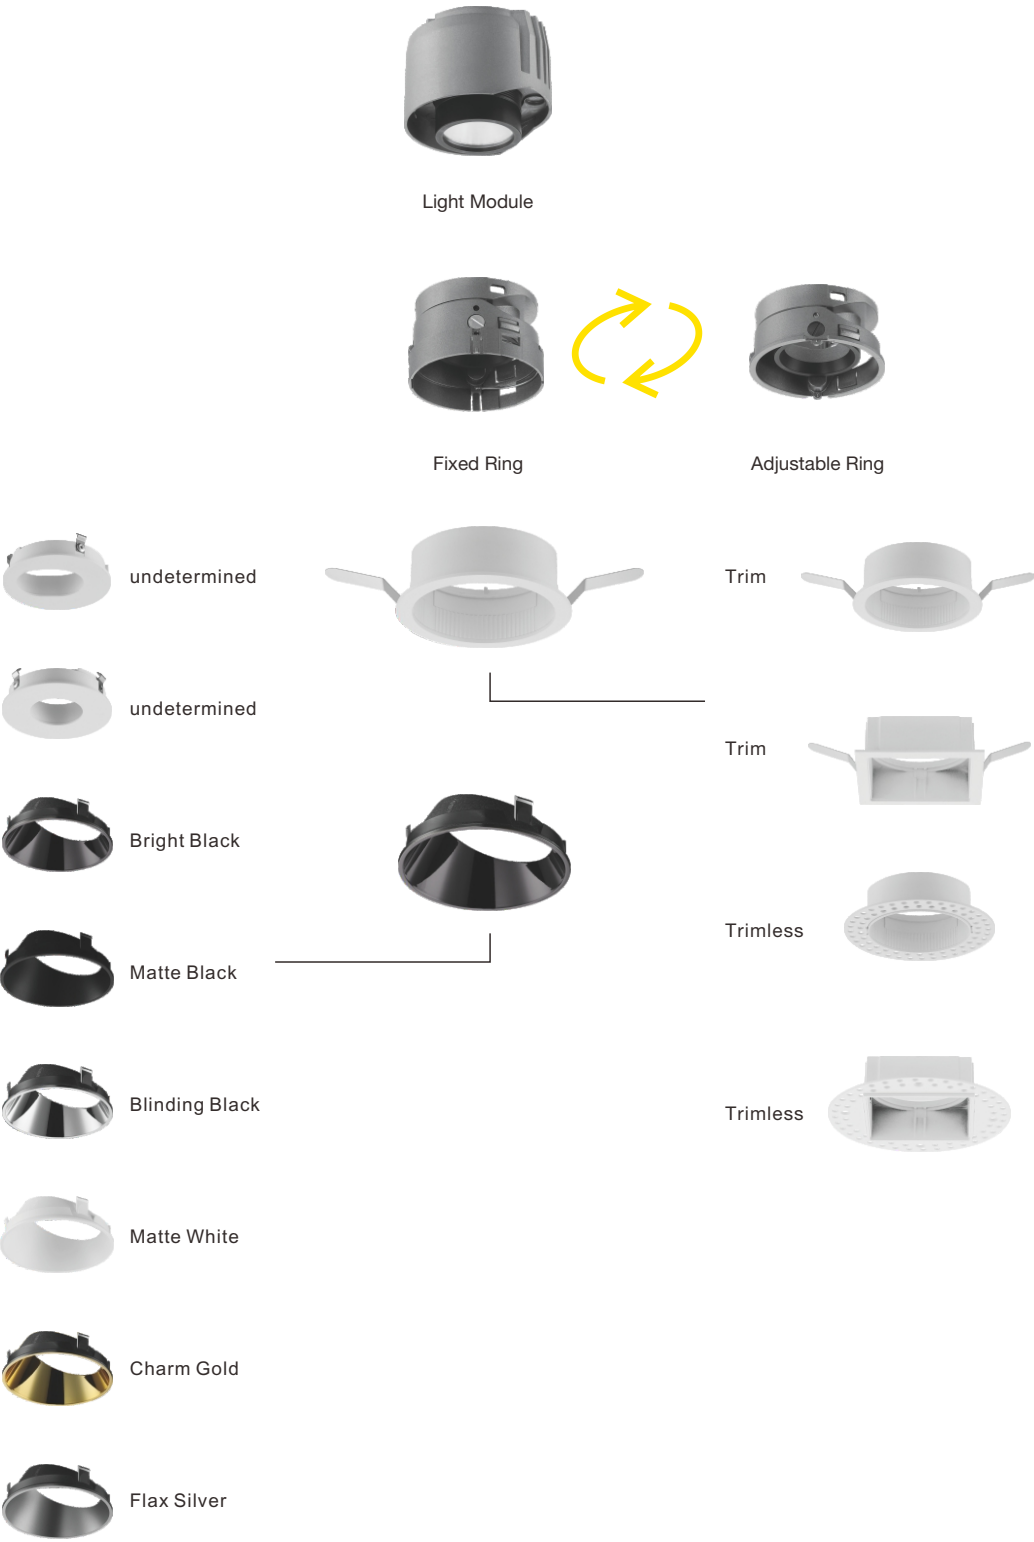

undetermined



undetermined



undetermined



undetermined



undetermined



undetermined




IP65

For Wet Environment



UGR<6

Light source, deep hiding, anti
dazzle the whole series of
products have excellent anti
glare effect, with the shading
angle greater than 40° and
UGR less than 6

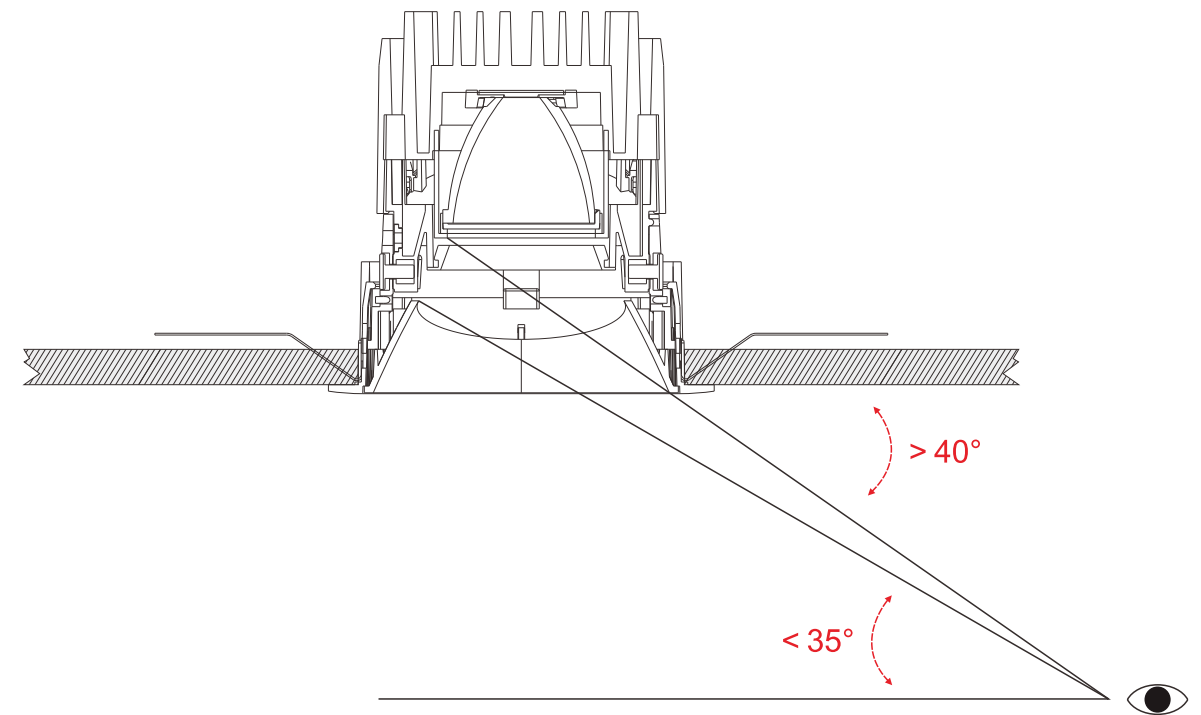


Undetermined




Hotel lighting design is not only for lighting, it should also play a role in creating atmosphere and improving decoration effect. Therefore, in terms of lighting design, it is necessary to give consideration to the shape, color and distribution of lamps and lanterns.


Good hotel design never let go of any details, especially in the important details such as lighting. In order to ensure the rationality of lighting design, the hotel should look for experienced professional decoration companies when planning to decorate, so that designers can design lighting reasonably.

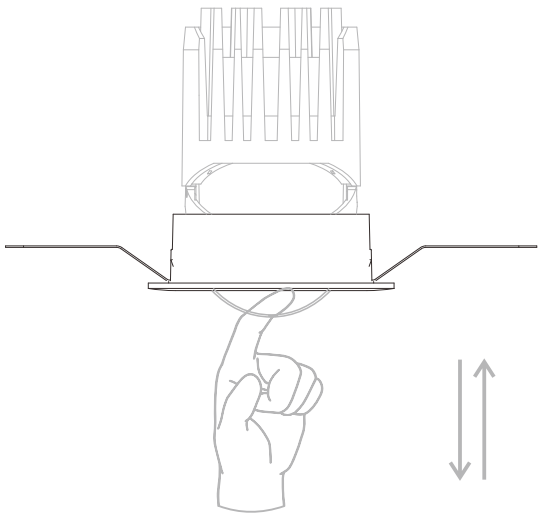

Undetermined

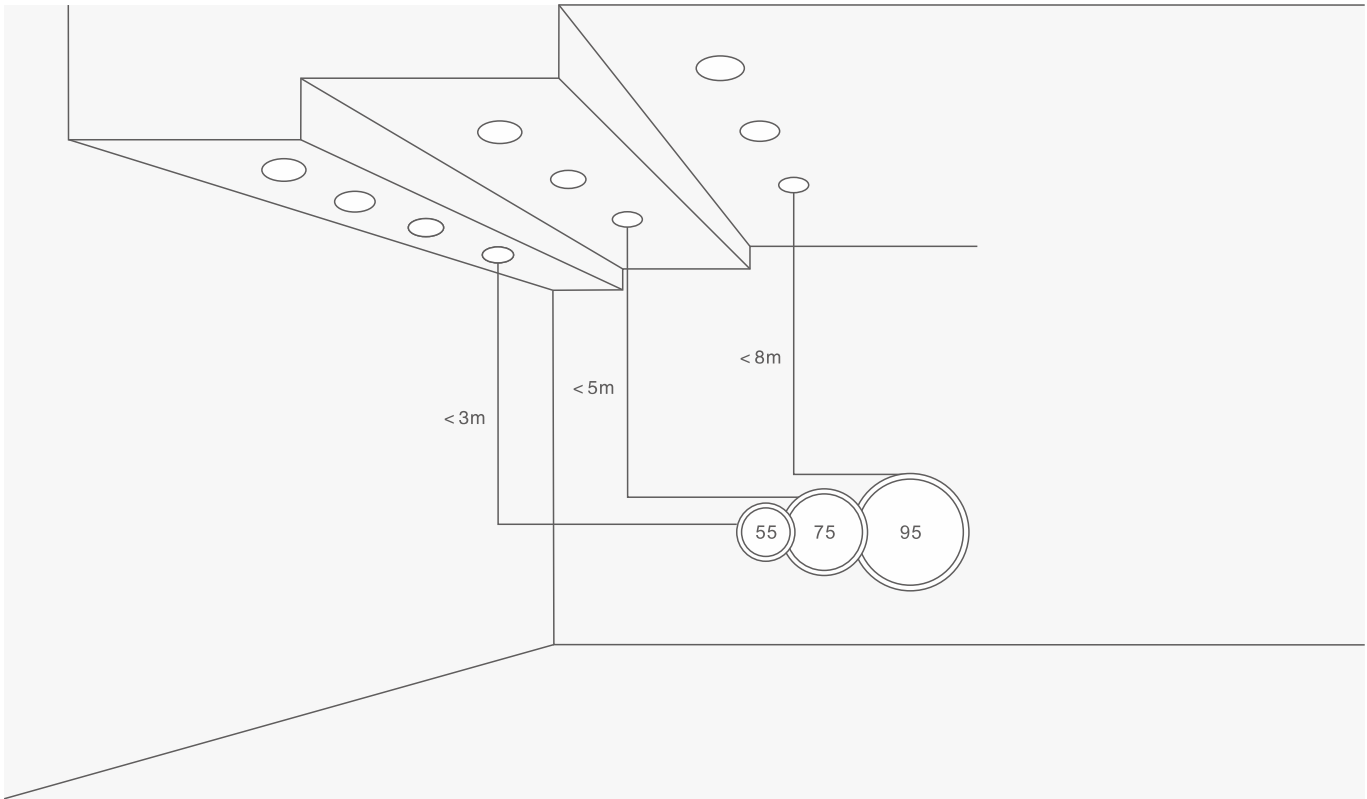


Φ55mm: 3w/5w/7w/10w
Φ75mm: 5w/7w/9w/12w/15w
Φ95mm: 15w/18w/24w/30w
Three opening sizes, suitable for all kinds of space below 8m height

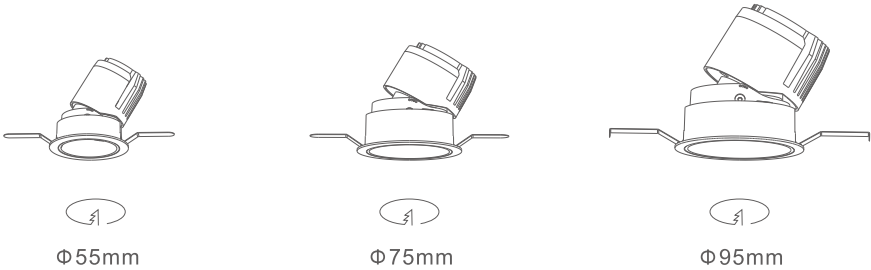


EDGE II Wall Washer



Installation specification

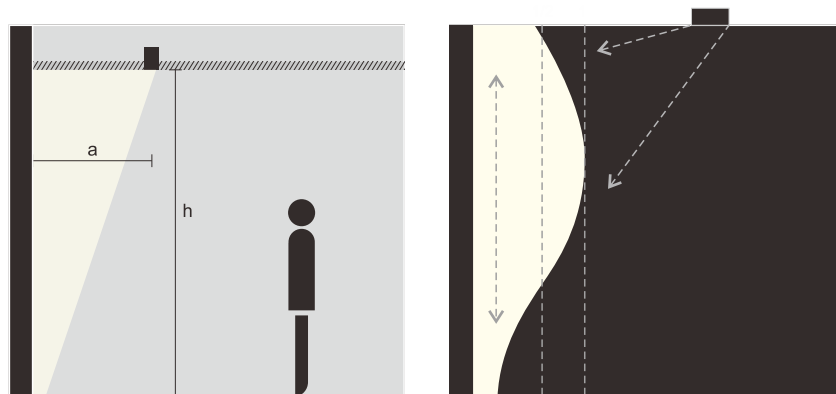


The distance from the fixture to the wall(a) is generally 1/3 of the height of the wall(h) and the distance between the fixtures(d) is 0.8 meters, achieving a very uniform wall washing effect.

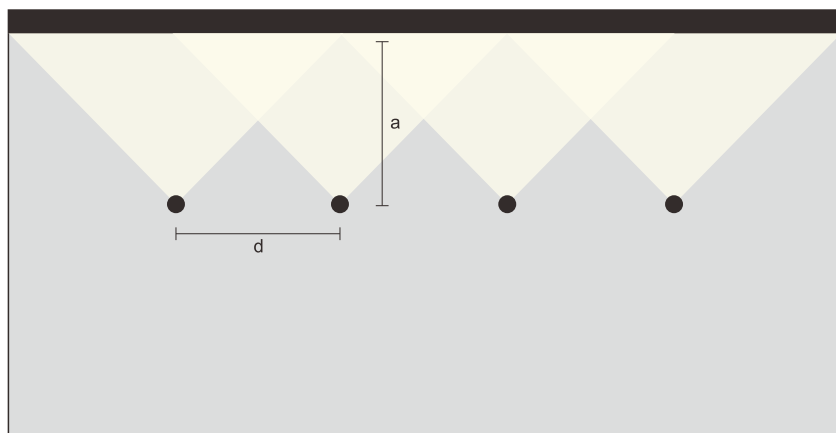


a:h=1:3

a=d

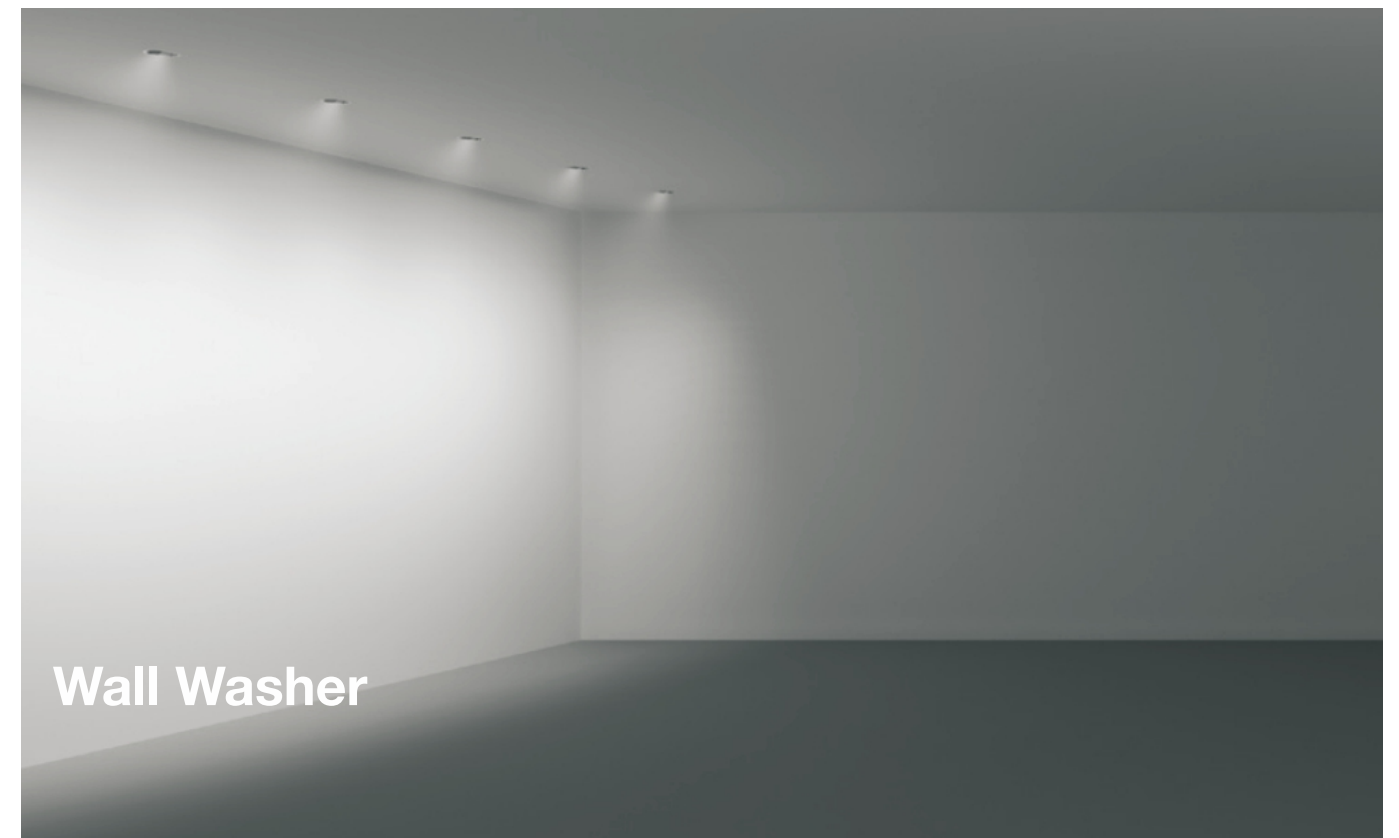


Every lighting task requires specific lighting tools. For this reason, we offer lighting experts different light distributions and beam shapes. Beside the spot reflectors, you can also find wallwasher from our multi-functional EDGE II family. It is equipped with a specially developed wallwasher reflector for efficient and uniform illumination on the wall from floor to ceiling. To obtain the best result, follow the recommended spacing and set out from the wall.


Fixed

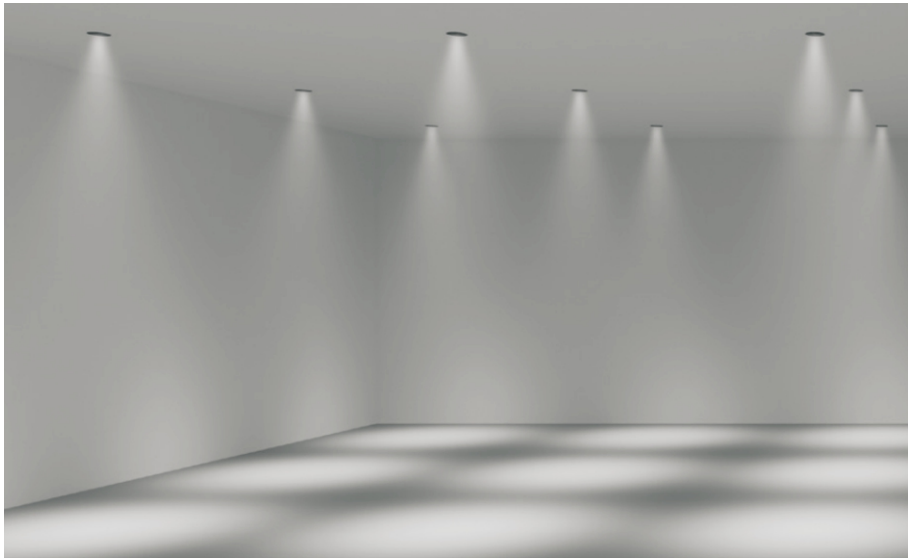



Featured with uniform light and glare-free illumination, combined with a vast range of options including different beams, colours temperatures, outputs, CRI and colour finishes, glare control accessories, all these together make it a truly versatile architectural lighting tool. The replaceable light engine with a pull-ring makes it a unique product which protects the ceiling during maintenance.

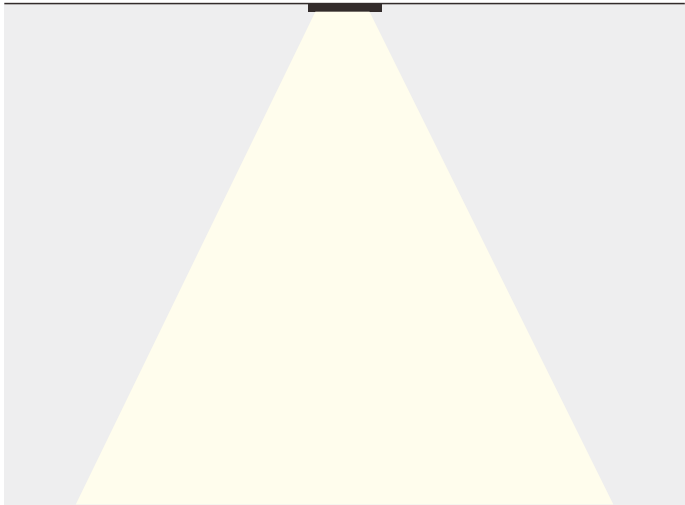

Adjustable

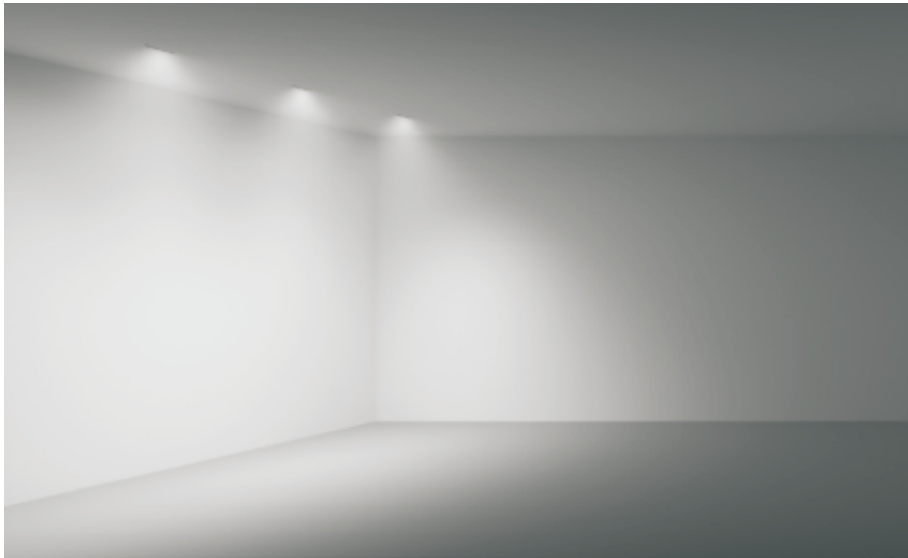

This 30° adjustable family is a versatile accent lighting solution. The tilt mechanism which allows the the luminaire to be angled up to 30° makes it an ideal choice for emphasizing of individual objects or architectural elements. The locator holes on each luminaire enables precise beam alignment for multiple fixtures.

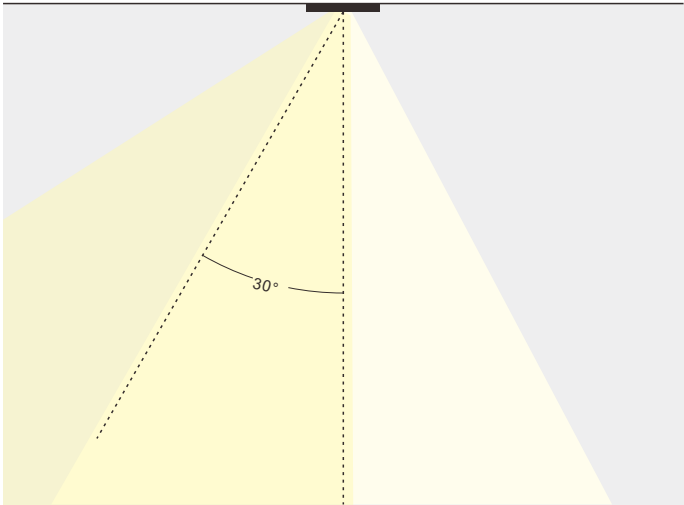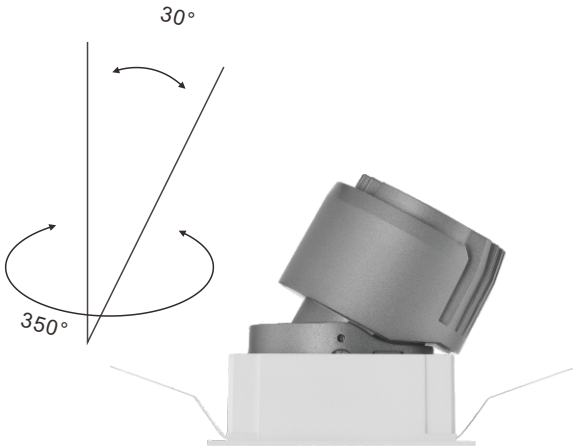



9W	(lm)		
	2700K	3000K	4000K
20°	460	495	559
30°	503	541	626
40°	532	572	645



9W	(lm)		
	2700K	3000K	4000K
20°	460	495	559
30°	503	541	626
40°	532	572	645



9W	(lm)		
	2700K	3000K	4000K
20°	460	495	559
30°	503	541	626
40°	532	572	645



9W	(lm)		
	2700K	3000K	4000K
20°	460	495	559
30°	503	541	626
40°	532	572	645



9W	(lm)		
	2700K	3000K	4000K
20°	460	495	559
30°	503	541	626
40°	532	572	645



9W	(lm)		
	2700K	3000K	4000K
20°	460	495	559
30°	503	541	626
40°	532	572	645



9W	(lm)		
	2700K	3000K	4000K
20°	460	495	559
30°	503	541	626
40°	532	572	645



9W	(lm)		
	2700K	3000K	4000K
20°	460	495	559
30°	503	541	626
40°	532	572	645



REG75



REG2075AR

11W	(lm)		
	2700K	3000K	4000K
20°	676	727	819
31°	680	731	824
40°	719	773	872



REG2075AS

11W	(lm)		
	2700K	3000K	4000K
20°	676	727	819
31°	680	731	824
40°	719	773	872



REG2075FR

11W	(lm)		
	2700K	3000K	4000K
20°	676	727	819
31°	680	731	824
40°	719	773	872



REG2075FS

11W	(lm)		
	2700K	3000K	4000K
20°	676	727	819
31°	680	731	824
40°	719	773	872



REG2075WR

11W	(lm)		
	2700K	3000K	4000K
S	368	391	408
M	456	485	561
F	424	451	468



REG2075WS

11W	(lm)		
	2700K	3000K	4000K
S	368	391	408
M	456	485	561
F	424	451	468



REG2075FS

11W	(lm)		
	2700K	3000K	4000K
20°	676	727	819
31°	680	731	824
40°	719	773	872



REG2075WR

11W	(lm)		
	2700K	3000K	4000K
S	368	391	408
M	456	485	561
F	424	451	468



REG2075WS

11W	(lm)		
	2700K	3000K	4000K
S	368	391	408
M	456	485	561
F	424	451	468



REG95



REG2095AR			
20W	(lm)		
	2700K	3000K	4000K
20°	1128	1213	1307
25°	1193	1283	1649
38°	1233	1326	1334



REG2095AR			
20W	(lm)		
	2700K	3000K	4000K
20°	1128	1213	1307
25°	1193	1283	1649
38°	1233	1326	1334



REG2095FR			
20W	(lm)		
	2700K	3000K	4000K
20°	1128	1213	1307
25°	1193	1283	1649
38°	1233	1326	1334



REG2095FS			
20W	(lm)		
	2700K	3000K	4000K
20°	1128	1213	1307
25°	1193	1283	1649
38°	1233	1326	1334



REG2095WR			
20W	(lm)		
	2700K	3000K	4000K
20°	689	733	809
25°	756	804	846
38°	794	845	903



REG2095WS			
20W	(lm)		
	2700K	3000K	4000K
20°	689	733	809
25°	756	804	846
38°	794	845	903

NRGSAVE srl

Strada Com. di Altessano 110/8

10151 - TORINO

tel. +3901119710670

info@nrgsave.it www.nrgsave.it